


## LS tension detector


The LS series tension detector is made to be used with the STC-858A automatic tension controller or STC-858B semi-automatic tension controller. This detector uses a high precision load cell and can perform high precision tension detection with excellent temperature and hysteresis characteristics.

### PARAMETER

MODEL	LS-005TD	LS-015TD	LS-030TD	LS-050TD	LS-100TD	LS-200TD
Rated torque	50N.m	150N.m	300N.m	500N.m	1000N.m	2000N.m
Working load direction	It protects itself with an overload cutoff in both pushing and pulling directions					
Working condition	Working temperature :0-40℃ Vibration: under 2m/S <sup>2</sup>					
Installation	Ground installation, hang up installaion, Wall mounting installation					
Weight	Approx. 1.8 kg					
Shaft apply for	204#					

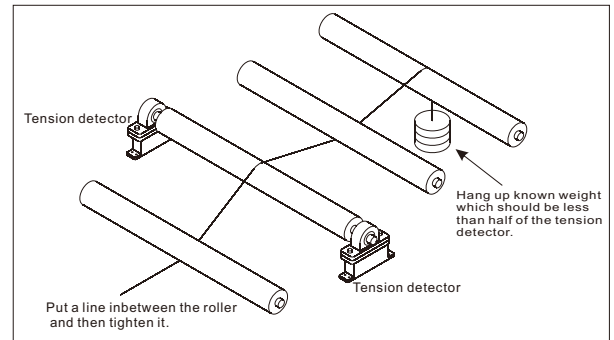

## Installation spec

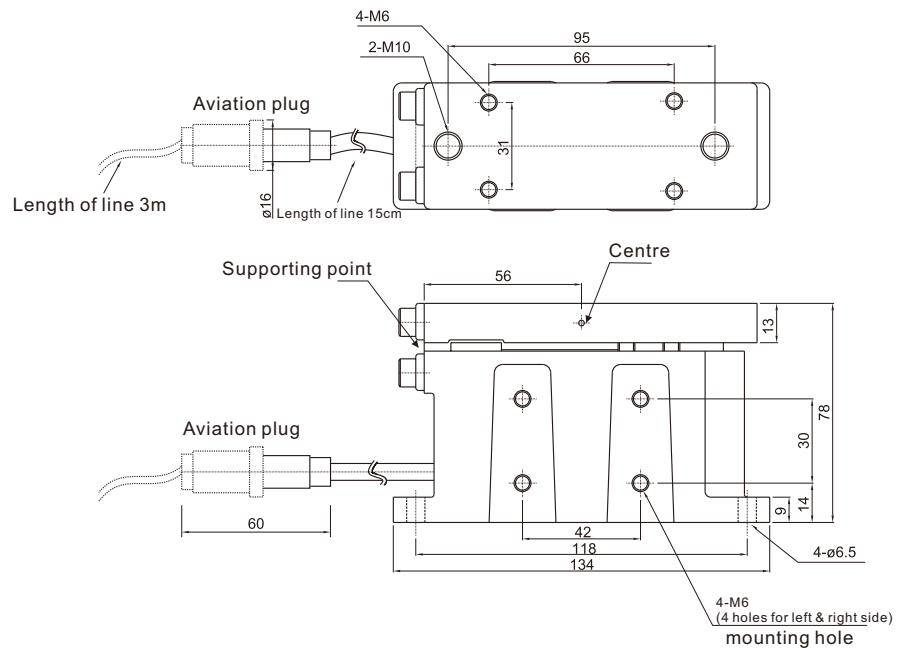

## Installation method

