


Specification:
 Style: DH130BLD2300-48A-30SM
 Voltage: 48V
 Power: 2300W
 Rated Current: 60A
 Rated Speed: 3000r/min
 Ratd Torque: 7.32N.m
 Protection Rank: IP65
 Environment Temperture: 0-50°C
 Humidity: < 90%

Brake Definition	
Color	Definition
Red	24V+
Blue	24V-

Power Definition		
No.	Definition	Color
1	U	Red
2	V	Yellow
3	W	Blue

Hall Definition		
Definition	Red	No
5V	Red	1
HALL A	Yellow	4
HALL B	Blue	5
HALL C	Green	6
GND	Black	2

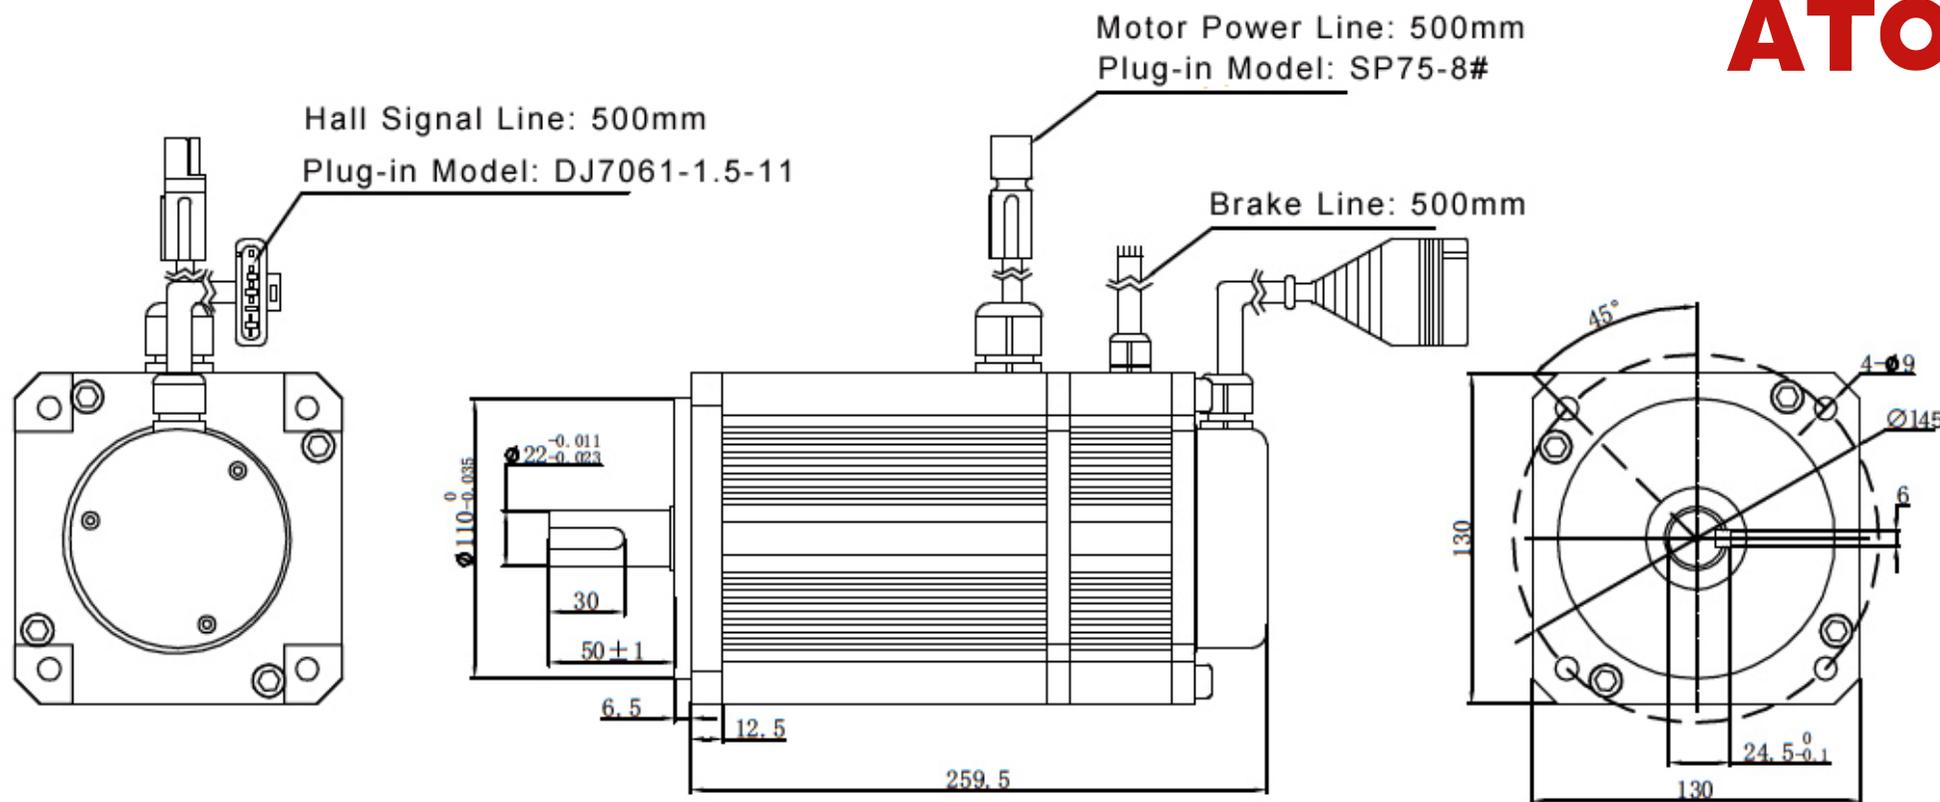

Specification:

Style: DH130BLD2300-72A-30SM

Voltage: 72V

Power: 2300W

Rated Current: 40A

Rated Speed: 3000r/min

Ratd Torque: 7.32N.m


Protection Rank: IP65 Environment

Temperture: 0-50°C Humidity: < 90%

Brake Definition	
Color	Definition
Red	24V+
Blue	24V-

Power Definition		
No.	Definition	Color
1	U	Red
2	V	Yellow
3	W	Blue

Hall Definition		
Definition	Red	No
5V	Red	1
HALL A	Yellow	4
HALL B	Blue	5
HALL C	Green	6
GND	Black	2

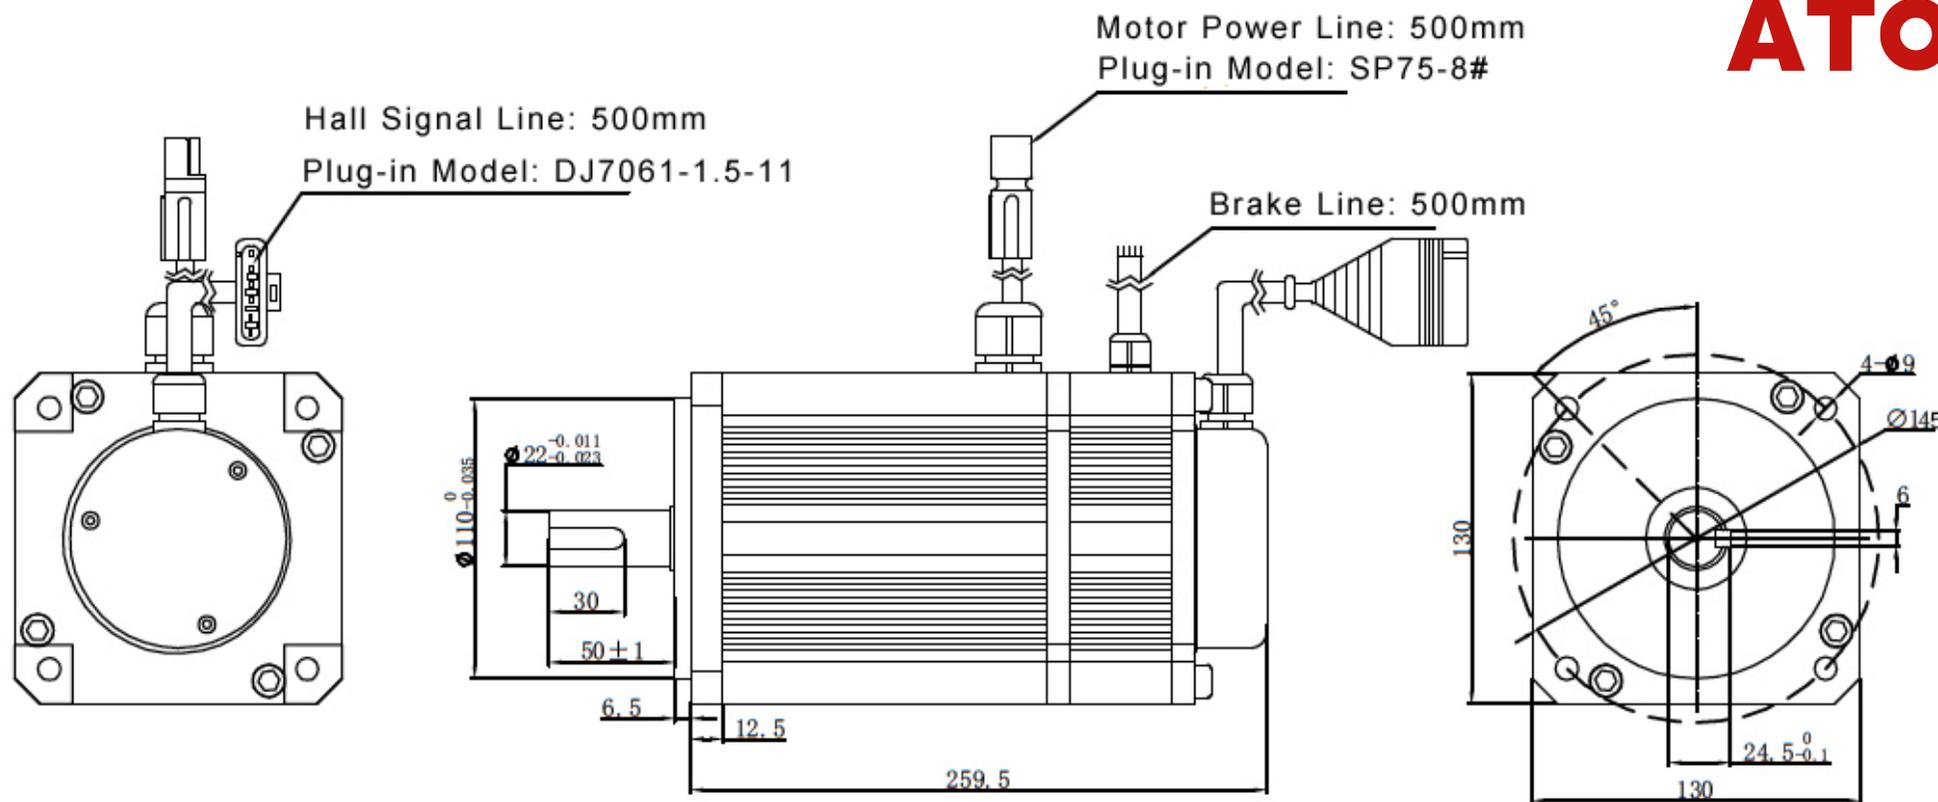

Specification:
 Style: DH130BLD2300-96A-30SM
 Voltage: 96V
 Power: 2300W
 Rated Current: 30A
 Rated Speed: 3000r/min
 Ratd Torque: 7.32N.m
 Protection Rank: IP65 Environment
 Temperture: 0-50°C Humidity: < 90%

Brake Definition	
Color	Definition
Red	24V+
Blue	24V-

Power Definition		
No.	Definition	Color
1	U	Red
2	V	Yellow
3	W	Blue

Hall Definition		
Definition	Red	No
5V	Red	1
HALL A	Yellow	4
HALL B	Blue	5
HALL C	Green	6
GND	Black	2