

3899 Series

H3899 series standard precise slip ring, integrated structure design, with through hole 38.1mm , OD99mm , suitable for rotating application which requires a through hole $\leq 38.1\text{mm}$ (remark: if need a hole $< 38.1\text{mm}$, can add a inner bushing)

Part No. description


H3899 - Power circuits no. - Signal circuits no. - Erodect grade

H:through hole slip ring
3899:ID 38mm, OD 99mm

Example:
0610:6 circuits,10A per circuit
1220:2circuits,10A per circuit

Example:
C : standard level
D:Industrial level
H:High quality level

Example:
06S:6circuits signal (0~2A)
12S:12circuits signal (0~2A)

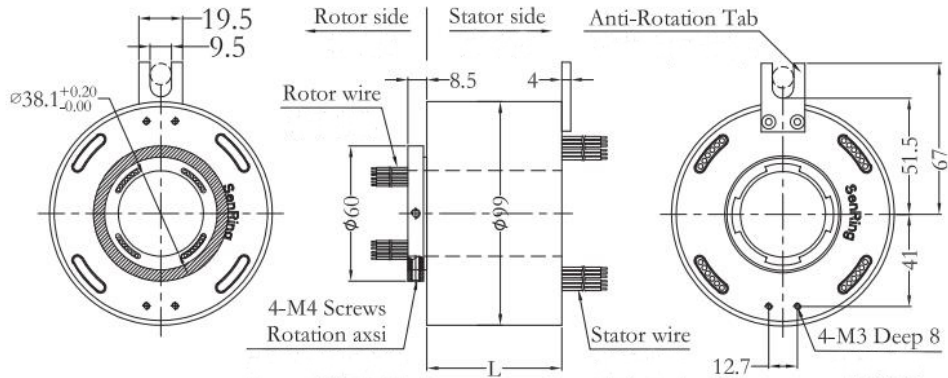

Standard Model List

H3899 series model list							
Part no.	Circuit		Length L(mm)	Part no.	Circuit		Length L(mm)
	10A	Signal or 0~5A			10A	Signal or 0~5A	
H3899-02S	0	2	32	H3899-1210-12S	12	12	120
H3899-0210	2	0	32	H3899-1810-06S	18	6	120
H3899-03S	0	3	36	H3899-2410	24	0	120
H3899-0310	3	0	36	H3899-30S	0	30	144
H3899-06S	0	6	48	H3899-0610-24S	6	24	144
H3899-0210-04S	2	4	48	H3899-1210-18S	12	18	144
H3899-0410-02S	4	2	48	H3899-1810-12S	18	12	144
H3899-0610	6	0	48	H3899-2410-06S	24	6	144
H3899-12S	0	12	72	H3899-3010	30	0	144
H3899-0210-10S	2	10	72	H3899-36S	0	36	168
H3899-0310-09S	3	9	72	H3899-0610-30S	6	30	168
H3899-0610-06S	6	6	72	H3899-1210-24S	12	24	168
H3899-0810-04S	8	4	72	H3899-3610	36	0	168
H3899-1010-02S	10	2	72	H3899-42S	0	42	192
H3899-1210	12	0	72	H3899-0610-36S	6	36	192
H3899-18S	0	18	96	H3899-1210-30S	12	30	192
H3899-0210-16S	2	16	96	H3899-48S	0	48	216
H3899-0410-14S	4	14	96	H3899-0610-42S	6	42	216
H3899-0610-12S	6	12	96	H3899-1010-38S	10	38	216
H3899-0810-10S	8	10	96	H3899-1210-36S	12	36	216
H3899-1010-08S	10	8	96	H3899-1810-30S	18	30	216
H3899-1210-06S	12	6	96	H3899-2410-24S	24	24	216
H3899-1410-04S	14	4	96	H3899-60S	0	60	264
H3899-1610-02S	16	2	96	H3899-0610-54S	6	54	264
H3899-24S	0	24	120	H3899-1010-50S	10	50	264
H3899-0410-20S	4	20	120	H3899-1210-48S	12	48	264
H3899-0610-18S	6	18	120	H3899-72S	0	72	312

Remark: Circuits can be combined in parallel for bigger current, N circuits of 10A or N*10A, such as 2 circuits of 10A in parallel for 20A use. 10A circuits No. and signal circuits (5A) No. can be customized based on standard products, please inquiry for details.

Technical Specification

Mechanical		Electrical		
Spec	Data	Spec	Data	
Working life	pls refer to product grade table		Power	Signal
Rotating speed	pls refer to product grade table	Rated voltage	0~690VAC/VDC	0~440VAC/VDC
Working temp.	-30°C~80°C	Insulation resistance	≥1000mΩ/500VDC	≥1000mΩ/500VDC
Work humidity	0~85% RH	Lead wire spec	AWG17# Silver-plated teflon	AWG22# Silver-plated teflon
Contact material	pls refer to product grade table	Lead wire length	standard 300mm(can be customized)	
Housing material	AL alloy	Dielectric Strength	800VAC@50Hz,60s	
Torque	0.1N.m (+0.03N.m/6circuits)	Electrical noise	<0.01Ω	
IP grade	IP51			

Product Grade Table

Grade code	Max rotating speed	Working life	Contact material
C:standard	400RPM	20millions revolutions	precious metal
D:industrial	800RPM	60millions revolutions	precious metal
H:high quality	1200RPM	150millions revolutions	gold alloy

Color code of Lead Wire

ring#	1	2	3	4	5	6	7	8	9	10	11	12
color	BLK	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	PINK	LGT BLU
ring#	13	14	15	16	17	18	19	20	21	22	23	24
color	WHT/BLK	WHT/BRN	WHT/RED	WHT/ORG	WHT/YEL	WHT/GRN	WHT/BLU	WHT/PUR	WHT/GRY	BLK/RED	BLK/BRN	Transparent

Remark: "1" : the first wire from rotor side , H3899-06S wire color sequence: BLK/BRN/RED/ORG/WHT/GRN , 24 color wires as one group , if more than 24wires, repeat as sequence , use number tube to tell group 1#, 2#....